


# 1/2" thru 1-1/2" FLUSH JOINT ENVIRONMENTAL

**DEAN BENNETT SUPPLY CO**  
Toll Free : 800 - 621 - 4291  
PRICES ARE YOUR NET COSTS

**PIPE** Page 75  
8 - 10 - 11

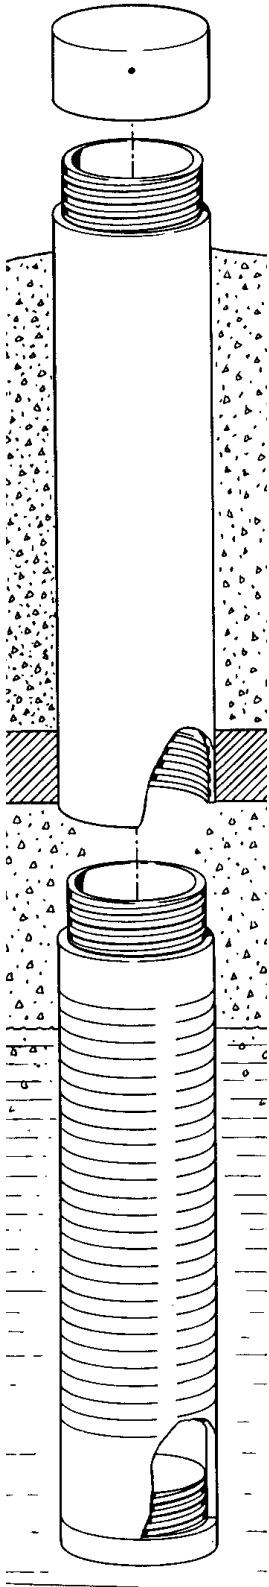

## 1/2" SCH 80 THREADED FLUSH JOINT P V C

Cleaned, bagged 5 lengths to a sack and cartoned 25 lengths to a carton.

O.D. of pipe .840" I.D. of pipe .546"  
Wall thickness .147" Weight per foot .20 lbs

\$ 17.65 lgth 1/2" x 5' lengths of Solid P V C Riser / Casing 12X5S80TFJSOL

Mill Slotting Specs: 2 rows of slots 1/4" spacing between slots  
.020" 20 Slot = .430 sq. in. of open area per linear foot of screen

\$ 27.25 lgth 1/2" x 5' lengths of 20 slot (.020") Well Screen 12X5S80TFJ020

## 3/4" SCH 80 THREADED FLUSH JOINT P V C

Cleaned, bagged 5 lengths to a sack, and cartoned 25 lengths to a carton

O.D. of pipe 1.050" I.D. of pipe .742"  
Wall thickness .154" Weight per foot .28 lbs

\$ 25.50 lgth 3/4" x 10' lengths of Solid P V C Riser / Casing 34X10S80TFJSOL

\$ 18.60 lgth 3/4" x 5' lengths of Solid P V C Riser / Casing 34X5S80TFJSOL

Mill Slotting Specs: 2 rows of slots 1/4" spacing between slots  
.020" 20 Slot = .602 sq. in. of open area per linear foot of screen

\$ 52.00 lgth 3/4" x 10' lengths of 20 slot (.020") Well Screen 34X10S80TFJ020

\$ 28.30 lgth 3/4" x 5' lengths of 20 slot (.020") Well Screen 34X5S80TFJ020

## 1" SCH 80 THREADED FLUSH JOINT P V C

Cleaned, bagged 5 lengths to a sack, and cartoned 25 lengths to a carton

O.D. of pipe 1.310" I.D. of pipe .957"  
Wall thickness .179" Weight per foot .42 lbs

\$ 25.75 lgth 1" x 10' lengths of Solid P V C Riser / Casing 1X10S80TFJSOL

\$ 20.50 lgth 1" x 5' lengths of Solid P V C Riser / Casing 1X5S80TFJSOL

Mill Slotting Specs: 2 rows of slots 1/4" spacing between slots  
.020" 20 Slot = 1.032 sq. in. of open area per linear foot of screen

\$ 53.60 lgth 1" x 10' lengths of 20 slot (.020") Well Screen 1X10S80TFJ020

\$ 29.85 lgth 1" x 5' lengths of 20 slot (.020") Well Screen 1X5S80TFJ020

## 1-1/4" SCH 80 THREADED FLUSH JOINT P V C

Cleaned, bagged 2 lengths to a sack, and cartoned 14 lengths to a carton

O.D. of pipe 1.660" I.D. of pipe 1.278"  
Wall thickness .191" Weight per foot .58 lbs

\$ 36.30 lgth 1-1/4" x 10' lengths of Solid P V C Riser / Casing 114X10S80TFJSOL

\$ 22.70 lgth 1-1/4" x 5' lengths of Solid P V C Riser / Casing 114X5S80TFJSOL

Mill Slotting Specs: 3 rows of slots 1/4" spacing between slots  
.020" 20 Slot = 1.720 sq. in. of open area per linear foot of screen

\$ 57.00 lgth 1-1/4" x 10' lengths of 20 slot (.020") Well Screen 114X10S80TFJ020

\$ 36.50 lgth 1-1/4" x 5' lengths of 20 slot (.020") Well Screen 114X5S80TFJ020

## 1-1/2" SCH 80 THREADED FLUSH JOINT P V C

Cleaned, bagged 2 lengths to a sack, and cartoned 14 lengths to a carton

O.D. of pipe 1.900" I.D. of pipe 1.500"  
Wall thickness .200" Weight per foot .70 lbs

\$ 38.55 lgth 1-1/2" x 10' lengths of Solid P V C Riser / Casing 112X10S80TFJSOL

\$ 25.10 lgth 1-1/2" x 5' lengths of Solid P V C Riser / Casing 112X5S80TFJSOL

Mill Slotting Specs: 3 rows of slots 1/4" spacing between slots  
.020" 20 Slot = 2.150 sq. in. of open area per linear foot of screen

\$ 60.40 lgth 1-1/2" x 10' lengths of 20 slot (.020") Well Screen 112X10S80TFJ020

\$ 37.85 lgth 1-1/2" x 5' lengths of 20 slot (.020") Well Screen 112X5S80TFJ020

**5' LENGTHS CAN BE SHIPPED NEXT DAY UPS AIR**